


Steel wire slings

4K Four-leg

Factor of safety: **6**

Standard: **DIN 3088**

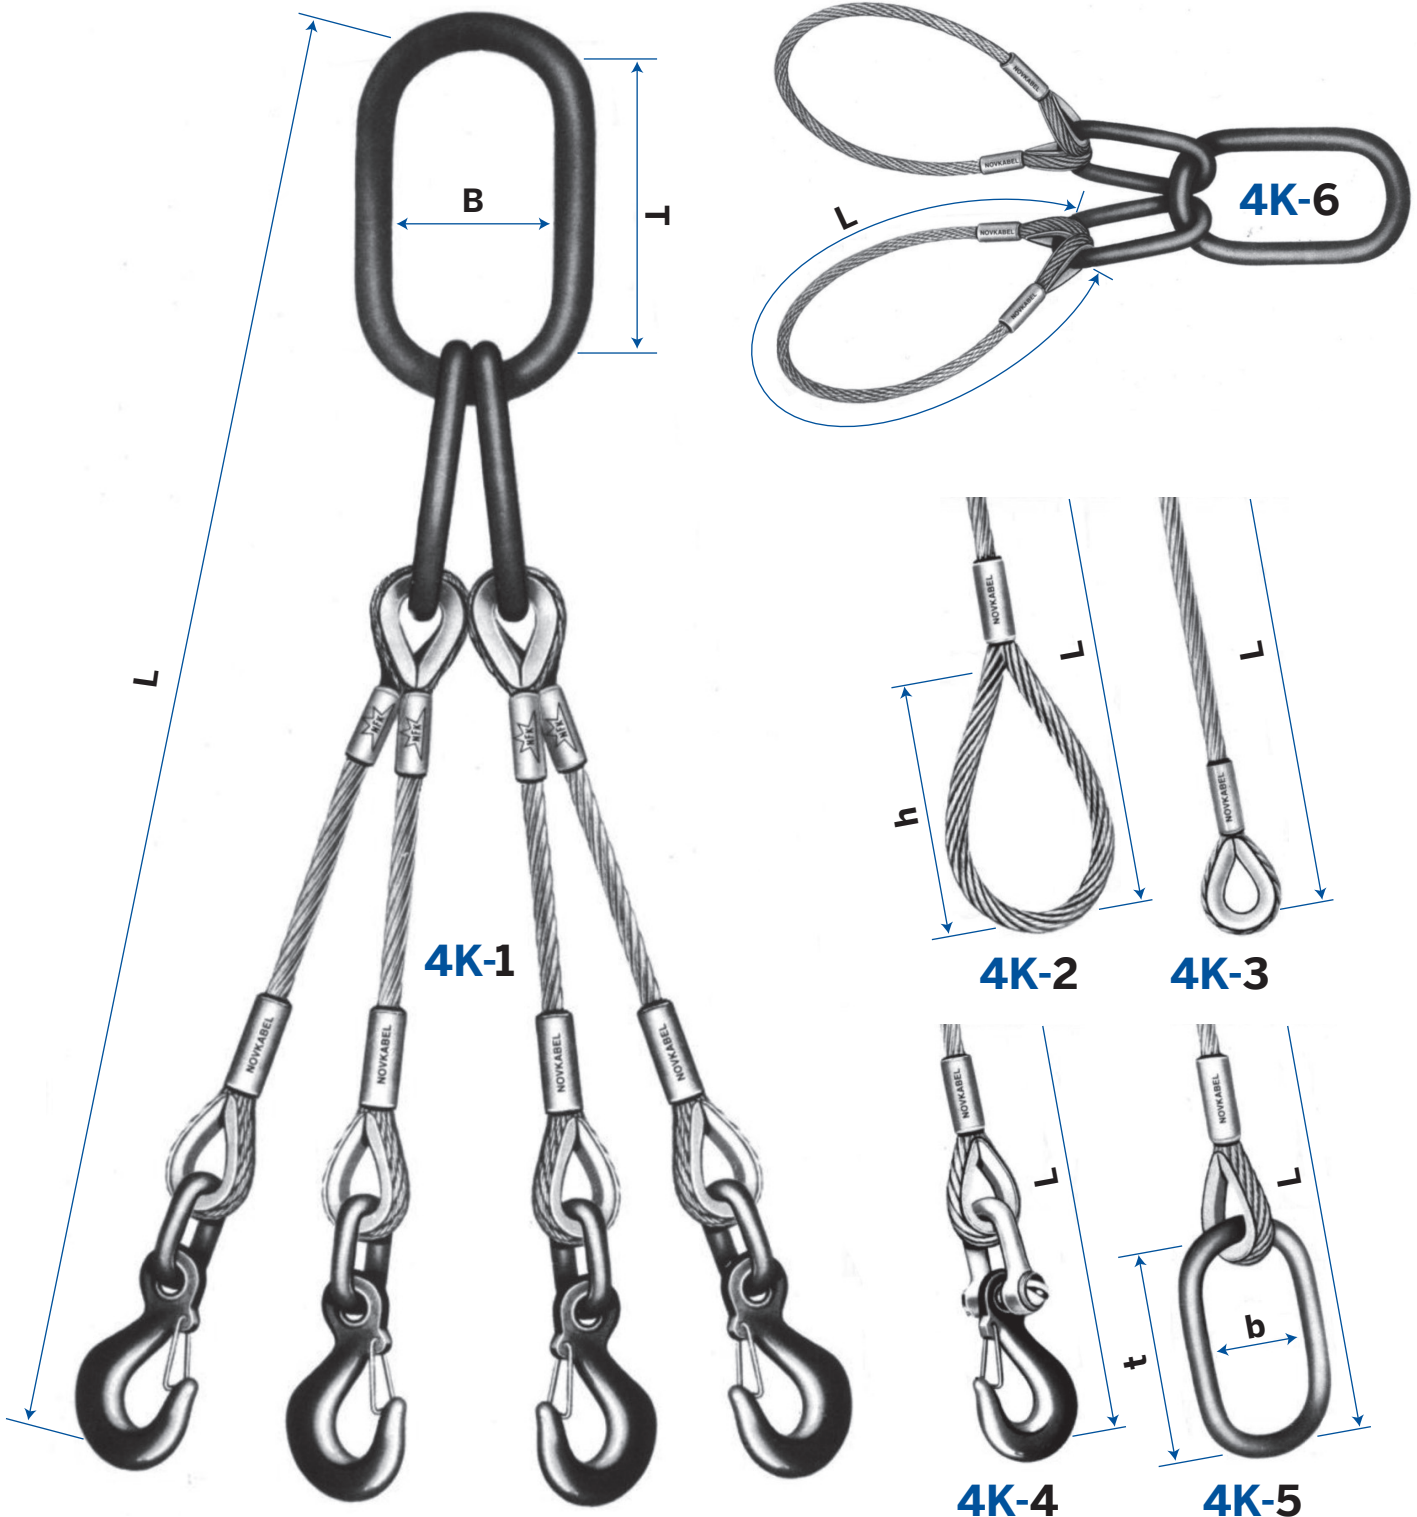

Four-leg

Nom. rope dia. d mm	Calc. break. load of the rope kN	Unit weight of the rope kg/m	Permitted load kg				Elementi priveznice							
			One shank	Hanging of the load with an angle α between the shanks			Min. length of the loop h mm	Thimble No.	shackle No.	hook No.	Main link		Outer link	
				ab. 0° to 45°	ab. 45° to 90°	above 90° to 120°					T mm	B mm	t mm	b mm
6	22,80	0,125	387	1431	1096	775	90	6	0,4	18	110	60	110	60
7	31,00	0,170	527	1946	1490	1053	105	7	0,6	18	110	60	110	60
8	40,50	0,221	688	2543	1946	1376	120	9	1	19	135	75	110	60
9	51,20	0,280	870	3215	2460	1740	135	9	1	21	160	90	110	60
10	63,30	0,346	1075	3974	3042	2151	150	11	1,6	21	160	90	110	60
11	76,50	0,419	1300	4803	3676	2599	165	11	1,6	23	160	90	110	60
12	91,10	0,498	1548	5720	4378	3095	180	13	1,6	23	180	100	110	60
13	107	0,585	1818	6718	5142	3636	195	13	2	23	180	100	110	60
14	124	0,678	2107	7785	5959	4213	210	15	2,5	25	180	100	110	60
16	162	0,886	2752	10171	7785	5505	240	16	3	25	200	110	135	75
18	205	1,12	3483	12871	9851	6966	270	18	4	27	260	140	160	90
20	253	1,38	4298	15885	12158	8597	300	20	5	27	300	160	160	90
22	306	1,67	5199	19212	14704	10398	330	22	6	28	340	180	160	90
24	364	1,99	6184	22854	17491	12368	360	24	8	28	350	190	180	100
26	428	2,34	7271	26872	20567	14543	390	26	8	29	350	190	180	100
28	496	2,71	8427	31141	23835	16854	420	28	10	30	350	190	200	110
30	569	3,21	9667	35725	27342	19334	450	30	10	30	400	200	200	110
32	648	3,54	11009	40685	31139	22018	480	32	12	31	400	200	200	110
34	731	4,19	12419	45896	35127	24839	510	34	16	31	430	220	260	140
36	820	4,48	13931	51484	39404	27863	540	36	16	32	430	220	260	140
40	1010	5,54	17159	63413	48534	34319	600	40	20	33	-	-	-	-
44	1220	6,70	20727	76598	58625	41454	660	44	25	34	-	-	-	-
48	1460	7,97	24805	91666	70158	49609	720	48	25	34	-	-	-	-